



The device view may deviate!


## Module 96-RCM-E (from firmware 3.00)

Extension module for the device series  
UMG 96-PA (from firmware 2.0) and UMG 96-PQ-L


Data sheet

# DEVICE VIEWS

The illustrations are for illustrative purposes and are not to scale.

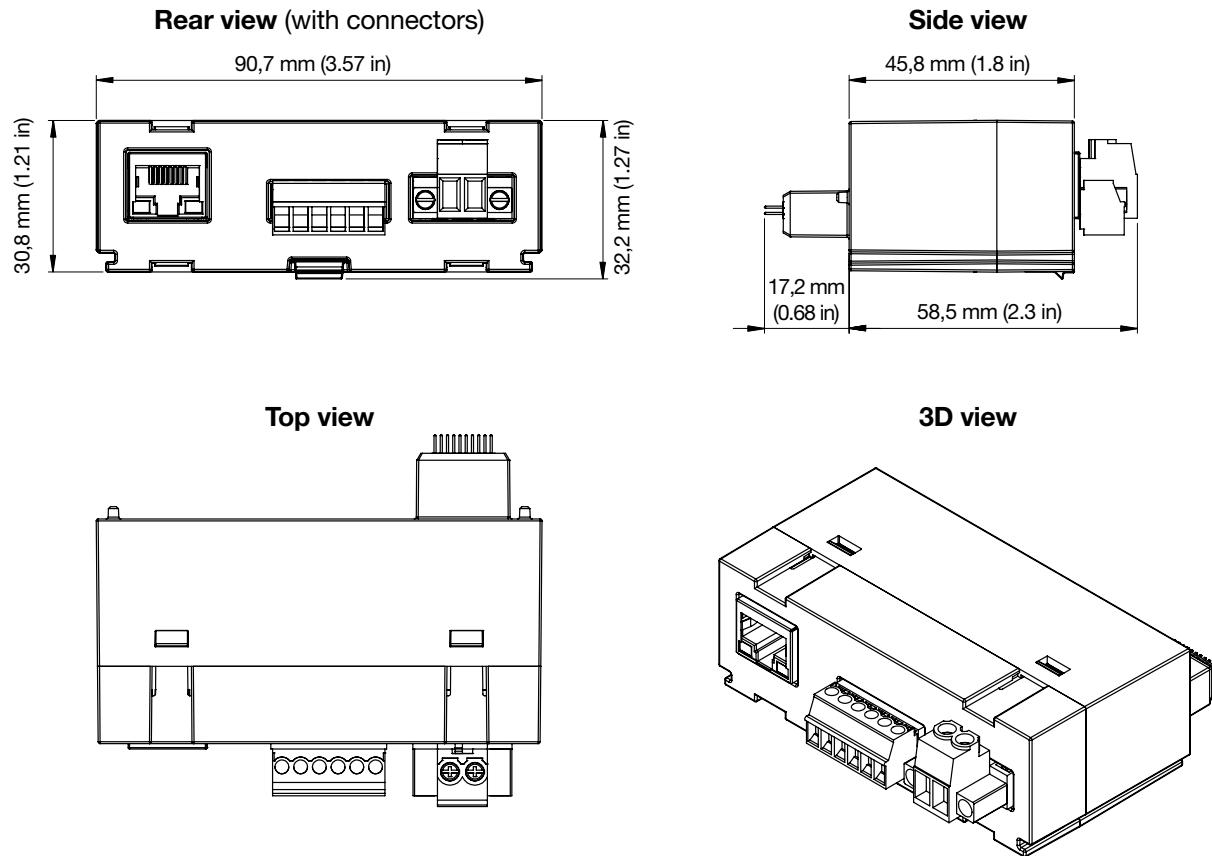

**Views of the UMG 96-PA/96-PQ-L basic device with the module attached**

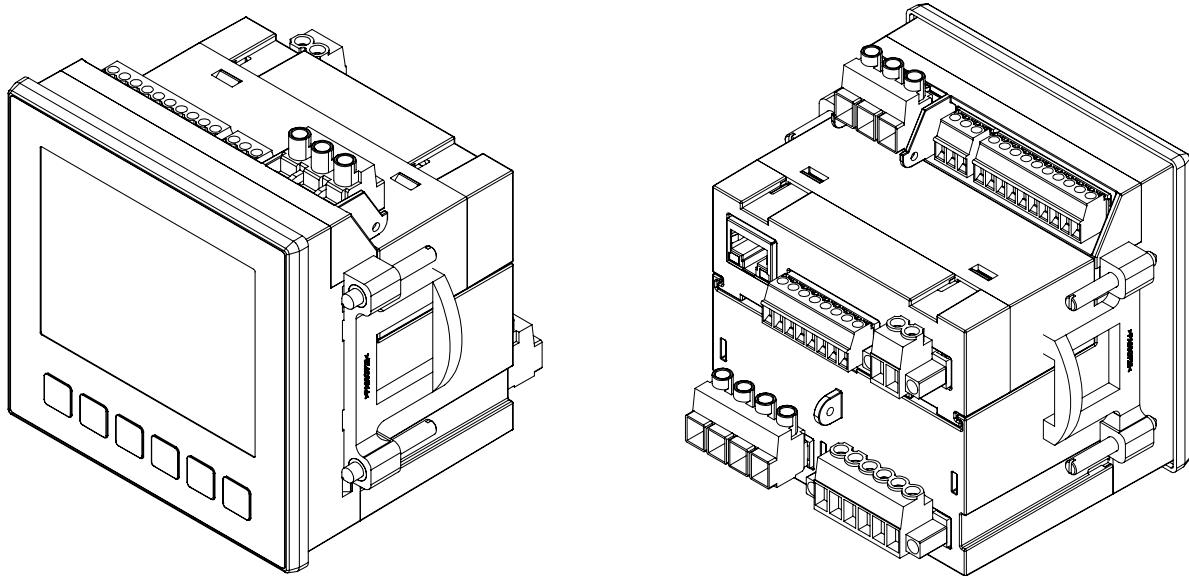

# TECHNICAL DATA

<b>General</b>	
Net weight of <b>module</b> (with attached plug-in connectors)	78 g (0.17 lbs)
Impact resistance	IK07 according to IEC 62262

<b>Transport and storage</b>	
The following specifications apply for devices transported and stored in the original packaging.	
Free fall	1 m (39.37 in)
Temperature	K55 -25° C (-13 °F) to +70° C (158 °F)
Relative air humidity (non-condensing)	0 to 90% RH

**Environmental conditions during operation, see the usage information for your basic device.**

<b>Analog inputs</b>	
Differential or current signals	2x
Temperature measurement	1x

<b>Residual current input</b>	
Nominal current	30 mA <sub>rms</sub>   0...20 mA   4...20 mA
Measuring range	0 .. 30 mA <sub>rms</sub>
Operating current	50 µA
Resolution	1 µA
Cable break detection (failure monitoring)	Can be activated
Crest factor	1.414 (relative to 30 mA)
Load	4 Ω
Overload for 1 s	1 A
Constant overloaded	200 mA
Measurement of residual currents	According to IEC/TR 60755 (2008-01):   Type A   Type B and B+ <sup>1)</sup>

<sup>1)</sup> Residual current transformers type B+ required.

<b>Temperature measurement</b>	
Update time	200 ms
Suitable thermal sensor	PT100, PT1000, KTY83, KTY84
Total burden (thermal sensor and lead)	max. 4 kΩ

<b>Thermal sensor type</b>	<b>Temperature range</b>	<b>Resistance range</b>	<b>Measurement uncertainty</b>
PT100	-99 °C (-146.2 °F) ... +500 °C (932 °F)	60 Ω ... 280 Ω	±1.5% rng
PT1000	-99 °C (-146.2 °F) ... +500 °C (932 °F)	600 Ω ... 2.8 kΩ	±1.5% rng
KTY83	-55 °C (-67 °F) ... +175 °C (347 °F)	500 Ω ... 2.6 kΩ	±1.5% rng
KTY84	-40 °C (-40 °F) ... +300 °C (572 °F)	350 Ω ... 2.6 kΩ	±1.5% rng

<b>Current measurement I4*</b>	
Nominal current	5 A
Measuring range	0.005 .. 6 A <sub>rms</sub>
Crest factor	2 (relative to 6 A <sub>rms</sub> )
Overshoot category	300 V CAT II
Power consumption	approx. 0.2 VA (R <sub>i</sub> = 5 mΩ)
Sampling frequency	8.33 kHz
Resolution	16 bit
Rated surge voltage	2.5 kV
Overload for 1 s	60 A (sinusoidal)

\* Exception: These specifications for I4 current measurement do not apply in combination with the UMG 96-PQ-LP as the basic device. As this device is equipped with four current measurement inputs, the I4 current measurement is carried out on the UMG 96-PQ-L-LP. In this case, the I4 current measurement input of the RCM module cannot be used and the specifications marked here do not apply.

<b>Ethernet interface</b> (only module 96-RCM-E)		
Connection	RJ45	
Functions	Modbus gateway	
Protocols	ARP, IPv4, ICMP (ping)	
	TCP, UDP	Port: Application specific
	Modbus TCP	Port: 502
	Modbus UDP	Port: 502
	DHCP/BootP	Port: 67/68 (UDP)
	DNS server	Port: 53 (UDP)
	NTP server	Port: 123 (UDP)

<b>Terminal connection capacity – Analog inputs (residual current, current signals, temperature)</b>	
Connectible conductors. Connect one conductor per terminal position!	
Single core, multi-core, fine-stranded	0.2 - 1.5 mm <sup>2</sup> , AWG 28-16
Wire ferrules (non-insulated)	0.2 - 1.5 mm <sup>2</sup> , AWG 26-16
Wire ferrules (insulated)	0.2 - 1.5 mm <sup>2</sup> , AWG 26-16
Tightening torque	0.2 - 0.25 Nm (1.77 - 2.21 lbf in)
Strip length	7 mm (0.2756 in)

<b>Terminal connection capacity (current measurement I4*)</b>	
Connectible conductors. Connect one conductor per terminal position!	
Single core, multi-core, fine-stranded	0.2 - 4 mm <sup>2</sup> , AWG 28-12
Wire ferrules (non-insulated)	0.2 - 2.5 mm <sup>2</sup> , AWG 26-14
Wire ferrules (insulated)	0.2 - 2.5 mm <sup>2</sup> , AWG 26-14
Tightening torque	0.4 - 0.5 Nm (3.54 - 4.43 lbf in)
Strip length	7 mm (0.2756 in)

<b>Cable lengths for analog input, residual current input, temperature measurement input, current measurement input I4*</b>	
Up to 30 m (32.81 yd)	Unshielded
Greater than 30 m (32.81 yd)	Shielded

<b>Potential isolation and electrical safety of the temperature measurement input</b>	
The temperature measurement input has:	
• Double insulation relative to the current measurement inputs, voltage measurement inputs and the supply voltage.	
• No insulation relative to the residual current input (RCM).	
• A functional isolation relative to the Ethernet interface.	
The external temperature sensor must have double insulation against system parts with hazardous contact voltage (according to IEC 61010-1:2010).	

# PERFORMANCE CHARACTERISTICS OF FUNCTIONS

Function	Symbol	Accuracy class	Measuring range	Display range
Neutral conductor current $I_4$ , measured*	$I_N$	1 (IEC61557-12)	0 .. 6 A <sub>rms</sub>	0 A .. 999 kA
Neutral conductor current $I_4$ , calculated*	$I_{Nc}$	1.0 (IEC61557-12)	0.03 .. 25 A	0.03 A .. 999 kA
Residual currents $I_5$ , $I_6$	$I_{Diff}$	1 (IEC61557-12)	0 .. 30 mA <sub>rms</sub>	0 A .. 999 kA
Temperature	T	-	See temperature sensor types	0°C ... +100°C (32°F ... 212°F)

\* Exception: These specifications for  $I_4$  current measurement do not apply in combination with the UMG 96-PQ-LP as the basic device. As this device is equipped with four current measurement inputs, the  $I_4$  current measurement is carried out on the UMG 96-PQ-L-LP. In this case, the  $I_4$  current measurement input of the RCM module cannot be used and the specifications marked here do not apply.

# **Janitza**<sup>®</sup>

Janitza electronics GmbH  
Vor dem Polstück 6 | 35633 Lahnau  
Germany

Tel. +49 6441 9642-0  
[info@janitza.com](mailto:info@janitza.com) | [www.janitza.com](http://www.janitza.com)